WORKERS' ACCOMMODATION (MESS)

20FT WORKERS' ACCOMMODATION (6 PEOPLE)

SKU ARK-MS20-06 | 20ft | Used Grade A | Ready stock

PURCHASE PRICE

Rp 99,000,000

MONTHLY RENTAL

Rp 4,400,000/mo

Up to 7% off for 12-month rentals

External dimensions	6.06 × 2.44 × 2.59 m
Internal dimensions	5.90 × 2.35 × 2.39 m
Capacity	6 people (3 bunk beds)
Lead time	Ready to ship in 7–10 working days

The 20ft Workers' Accommodation sleeps 6 people, with 3 bunk beds, wardrobes, AC and ventilation windows. An efficient choice for small teams or as an additional accommodation module.

Units can be placed side by side or stacked two stories high to form a mess complex.

SPECIFICATIONS

Frame	Original container frame + galvanized hollow-section reinforcement
Exterior wall	Corrugated steel plate (corten steel) 1.6–2.0 mm
Interior wall	PVC wall panels / GRC board, painted finish
Insulation	50 mm glass wool + aluminum foil
Ceiling	PVC panels + LED downlights
Floor	18 mm marine plywood + vinyl
Door	Steel panel door + mortise lock
Window	5 mm glass, aluminum frame + security grille
Electrical installation	1,300 VA, MCB, power sockets, LED lights
Paint	Anti-rust epoxy primer + PU topcoat

FEATURES & INCLUSIONS

- ✓ 3 bunk beds + mattresses
- ✓ Wardrobes
- ✓ 1 HP air conditioner
- ✓ Ventilation windows
- ✓ Fully insulated
- ✓ Stackable to 2 stories

Excludes 11% VAT & delivery. Prices may change without notice. Final prices are stated in our official quotation.

VIEW ONLINE
www.containermodifikasi.co.id/en/catalog/mess-pekerja-20ft-6-orang

DIMENSION DRAWING

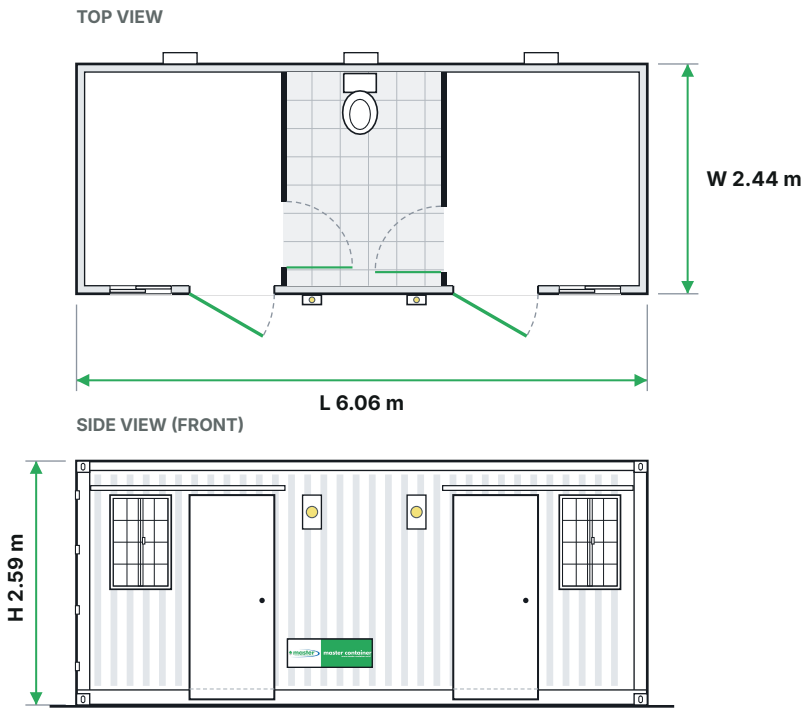

2 doors, 2 windows, 2 partitions, 3 exhaust fans, 2 ship lamps, 1 toilet, 1 floor tile area — Standard outer dimensions; door, window & fitting positions can be adjusted.

ADD-ONS (OPTIONAL)

ADD-ON	BUY	RENT/MO
1 HP Split AC (unit + installation)	**Rp 4,750,000**	Rp 350,000
Bunk Bed + Mattresses (per set)	**Rp 3,100,000**	Rp 200,000
Built-in Toilet (WC, washbasin, exhaust fan)	**Rp 12,500,000**	Rp 650,000
1,000 L Water Tank + Pump	**Rp 3,850,000**	Rp 250,000
Custom Paint Color + Company Logo	**Rp 4,250,000**	—

Excludes 11% VAT & delivery. Prices may change without notice. Final prices are stated in our official quotation.

VIEW ONLINE
www.containermodifikasi.co.id/en/catalog/mess-pekerja-20ft-6-orang